



LED 天井燈

應用：
倉庫、購物中心、體育館、工廠等



LED天井燈

型號：C3130






型號	C3130X-301*	C3130X-601*	C3130X-001*
額定光通量**	12600 lm(實測值:12335 lm)	12600 lm(實測值:12345 lm)	12600 lm(實測值:13015 lm)
額定電壓	100~240V, 50/60HZ		
功率因數	>0.95		
發光效率**	118.6 lm/W	119 lm/W	125.4 lm/W
額定功率	105W		
發光角度	30°	60°	110°
色溫	5000K / 4000K / 3000K		
CRI	>80, R9>0		
尺寸(±2mm)	Φ346mmx342mm(H)	Φ271mmx319mm(H)	Φ361mmx288mm(H)
重量(±5%)	3000g		

備註：*根據色溫，X 可為C(5000K)或N(4000K)或W(3000K)

**為5000K時所測量之數值

● 冷白5000K照度圖

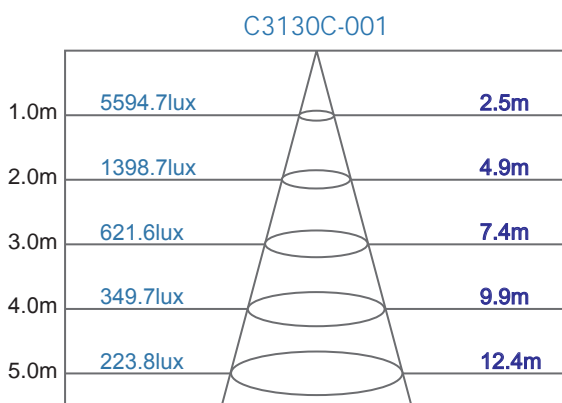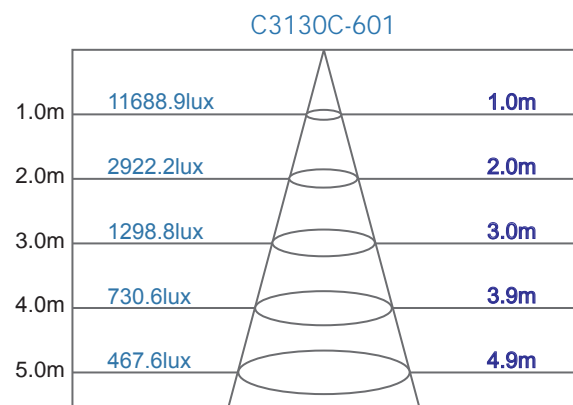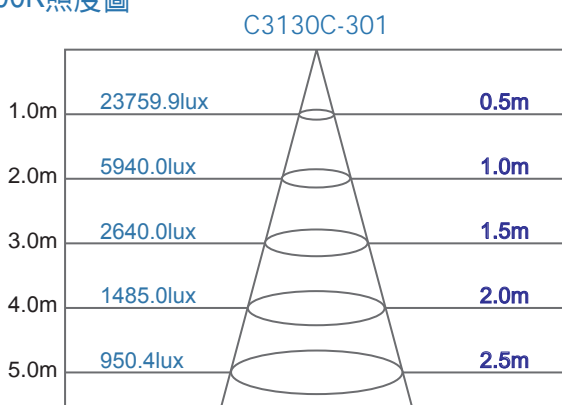

LED天井燈

型號：C3210



型號	C3210X-301*	C3210X-601*	C3210X-001*
額定光通量**	21000 lm(實測值:21110.4 lm)	21000 lm(實測值:20914.0 lm)	21000 lm(實測值:21864.1 lm)
額定電壓	100~240V, 50/60HZ		
功率因數	>0.95		
發光效率**	126.6 lm/W	125.5 lm/W	131.2 lm/W
額定功率	165W		
發光角度	30°	60°	110°
色溫	5000K / 4000K / 3000K		
CRI	>80, R9>0		
尺寸(±2mm)	Φ346mmx364mm(H)	Φ271mmx342mm(H)	Φ361mmx310mm(H)
重量(±5%)	4500g		

備註：*根據色溫，X 可為C(5000K)或N(4000K)或W(3000K)

**為5000K時所測量之數值

● 冷白5000K照度圖

