



www.cooled.com.tw
www.cooled.com.sg



LED 投射燈

應用：
倉庫、商場、停車場、工廠、廣告看板等



- 1500 lm (F2015)
- 3600 lm (F2036)
- 7000 lm (F2070)
- 11000 lm (F2110)
- 15000 lm (F2140)
- 29000 lm (F2280)

F2280 LED 投射燈



F2036 LED 投射燈



F2280 LED 投射燈



工程 實績

F2280 LED 投射燈



F2280 LED 投射燈



F2140 LED 投射燈




LED 投射燈

型號：F2015 / F2036



IP66


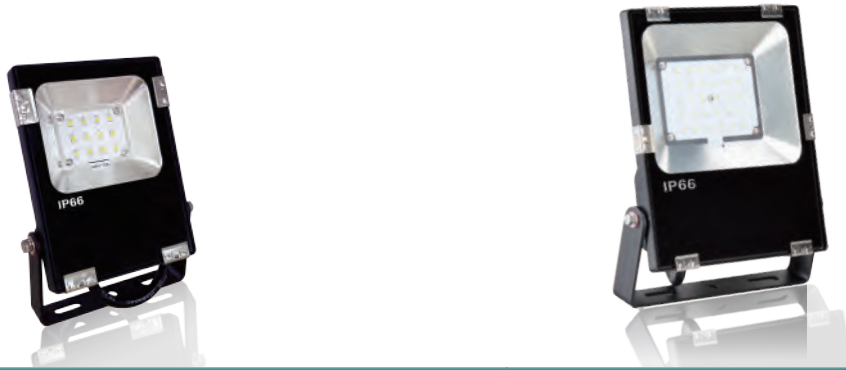


型號	F2015X-001*	F2036X-001*
額定光通量**	1500 lm (實測值:1519.6 lm)	3600 lm (實測值:3694.6 lm)
額定電壓	100~240VAC, 50/60HZ	
功率因數	>0.9	
發光效率**	120.6 lm/W	112 lm/W
額定功率	13W	33W
色溫	6000K / 5700K / 3000K	
CRI	>80, R9>0	
尺寸(±2mm)	166mm(L) x 116mm(W) x 32mm(H)	227mm(L) x 167mm(W) x 40mm(H)
重量(±5%)	460g	830g

備註：* 根據色溫，X 可為C(6000K / 5700K)或W(3000K)

** 為5700K時所測量之數值

● 冷白5700K照度圖

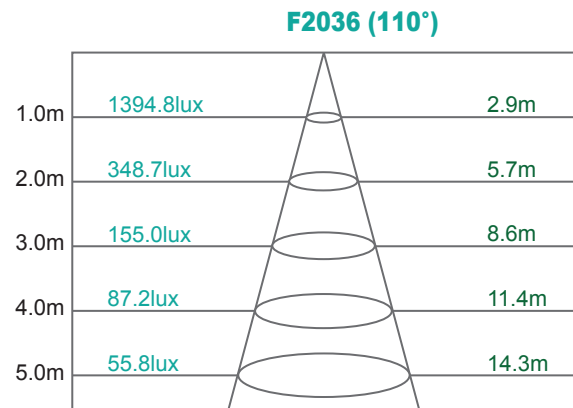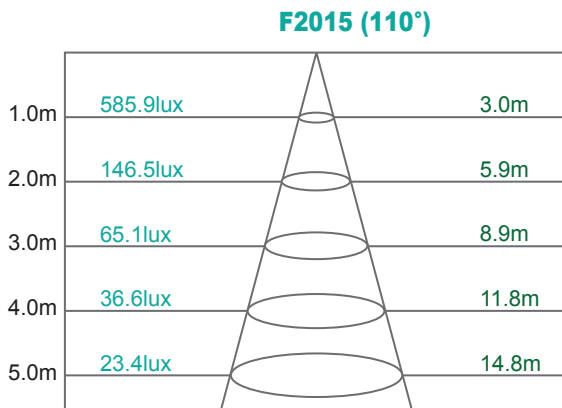

LED 投射燈

型號：F2070 / F2110





型號	F2070X-001*	F2110X-001*
額定光通量**	7000 lm (實測值:6960.3 lm)	11000 lm (實測值:11082.9 lm)
額定電壓	100~240VAC, 50/60HZ	
功率因數	>0.9	
發光效率**	114.9 lm/W	131.3 lm/W
額定功率	60W	85W
色溫	6000K / 5700K / 3000K	
CRI	>80, R9>0	
尺寸(±2mm)	311mm(L) x 220mm(W) x 50mm(H)	355mm(L) x 275mm(W) x 55mm(H)
重量(±5%)	1530g	3800g

備註：* 根據色溫，X 可為C(6000K / 5700K)或W(3000K)

** 為5700K時所測量之數值

● 冷白5700K照度圖

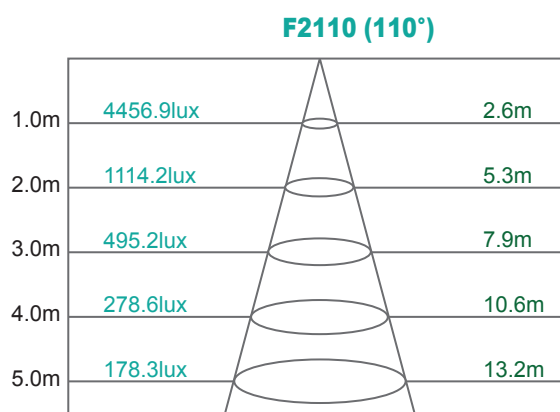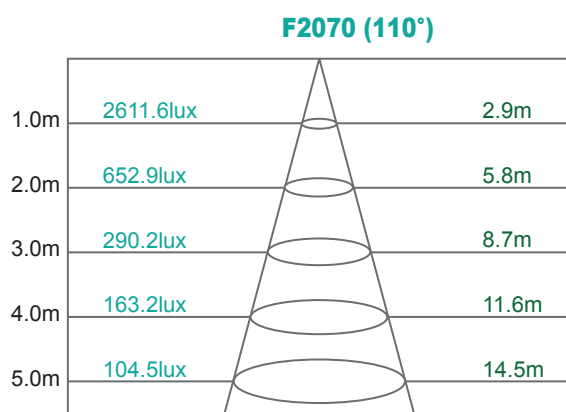

LED 投射燈

型號：F2140




型號	F2140X-201*	F2140X-401*	F2140X-001*
額定光通量**	13500 lm (實測值:13500.1 lm)	15000 lm (實測值:15828.1 lm)	15000 lm (實測值:15913.1 lm)
額定電壓	100~240V, 50/60HZ		
功率因數	>0.95		
發光效率**	113.9 lm/W	130.5 lm/W	131.6 lm/W
額定功率	120W		
角度	20°	40°	110°
色溫	5700K / 3000K		
CRI	>80, R9>0		
尺寸(±2mm)	402mm(L) x 325mm(W) x 60mm(H)		
重量(±5%)	4500g	4500g	4050g

備註：* 根據色溫，X 可為C(5700K)或W(3000K)


** 為5700K時所測量之數值

● 冷白5700K照度圖


F2140C-201 (20°)

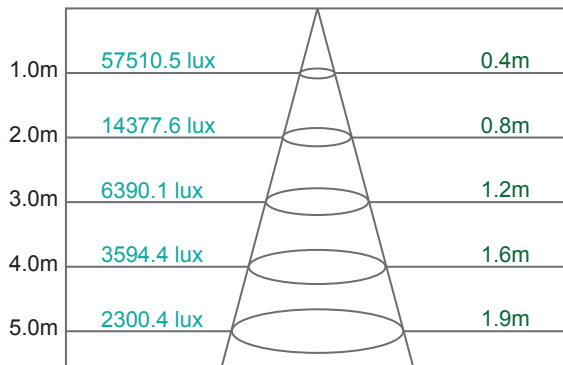

F2140C-401 (40°)

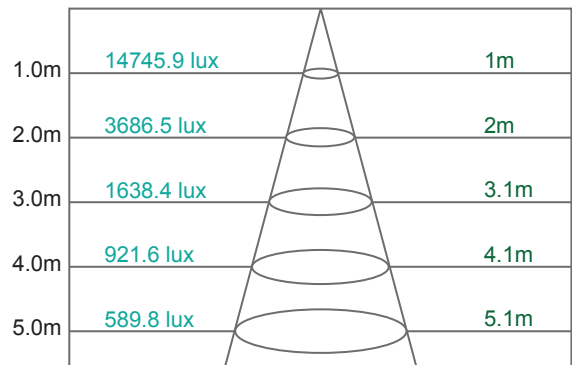


F2140C-001 (110°)

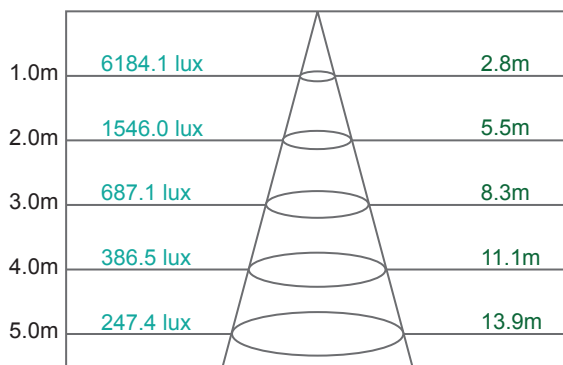

LED 投射燈

型號：F2280

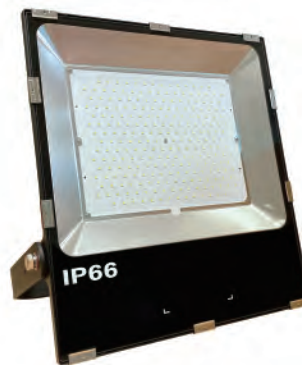


型號	F2280X-201*	F2280X-601*	F2280X-001*
額定光通量**	27800 lm (實測值:27809 lm)	28000 lm (實測值:28136.2 lm)	29000 lm (實測值:29154.2 lm)
額定電壓	100~240V, 50/60HZ		
功率因數	>0.95		
發光效率**	116.5 lm/W	116 lm/W	121.8 lm/W
額定功率	240W		
角度	20°	60°	110°
色溫	6000K / 3000K		
CRI	>80, R9>0		
尺寸(±2mm)	470mm(L) x 407mm(W) x 60mm(H)		
重量(±5%)	7000g	7000g	6600g

備註：* 根據色溫，X 可為C(6000K)或W(3000K)


** 為6000K時所測量之數值

● 冷白6000K照度圖

F2280C-201 (20°)

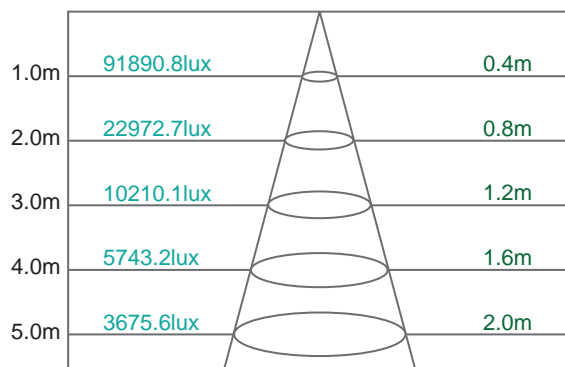

F2280C-601 (60°)

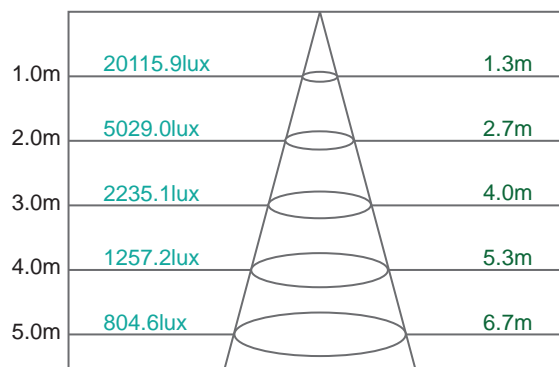

F2280C-001 (110°)

