



LED Downlight

APPLICATIONS:
Office, Hotel, Hospital, Indoor lighting etc.



3000 lm (DE030 , D3035)

6000 lm (DE060)

11000 lm (DE100)



DE100 LED Downlight

DE030 LED Downlight





D3035 LED Downlight

OUR PROJECTS




LED Downlight

Model : D3035

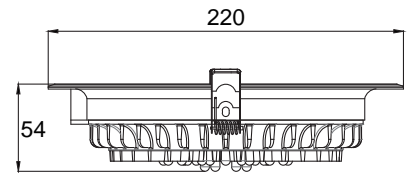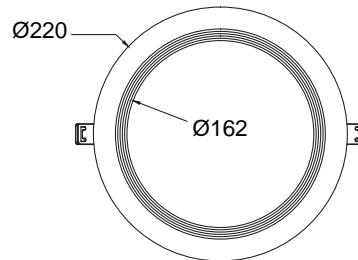

Part No.	D3035X-083*
Rated Lumen**	3000 lm (Measured value:2997.3 lm)
Rated Voltage	100~240, 50/60HZ
Power Factor	>0.9
Lighting Efficacy**	97 lm/W
Rated Power	30W
Beam Angle	110°
Color Temperature	5000K / 4000K / 3000K
CRI	>90, R9>0
Dimension(±2mm)	Φ220mm X 54mm(H) Hole : 190-195mm
Weight(±5%)	550g

● Diagram for illumination distance (Neutral White 4000K)

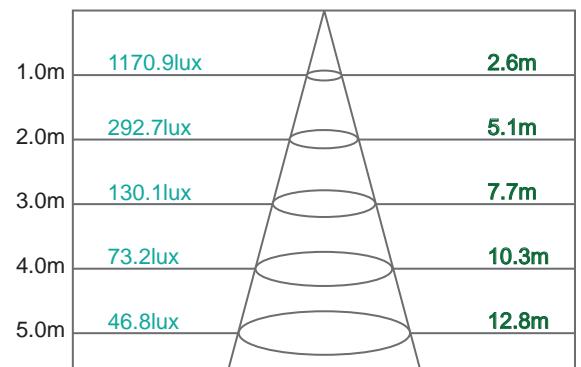

Note : * X can be replaced by C:5000K/ N:4000K/ W:3000K.

**The value is measured at 4000K.

LED Downlight

Model : DE030 / DE060 / DE100




Part No.	DE030X-191*	DE060X-191*	DE100X-191*
Rated Lumen**	3000 lm(Measured value:3150.5 lm)	6000 lm(Measured value:5974.2 lm)	11000 lm(Measured value:11056.2 lm)
Rated Voltage	100~240V, 50/60HZ		
Power Factor	>0.9		
Lighting Efficacy**	104 lm/W	97.3 lm/W	112 lm/W
Rated Power	30W	60W	100W
Beam Angle	100°		
Color Temperature	5000K / 3000K		
CRI	>80, R9>0		
Dimension(±2mm)	Φ240mm X 106mm (H) hole : 205mm		
Weight(±5%)	1077g	1100g	2000g

Note : * X can be replaced by C:5000K/ W:3000K.


**The value is measured at 5000K.

● Diagram for illumination distance(Cool White 5000K)

DE030C-191

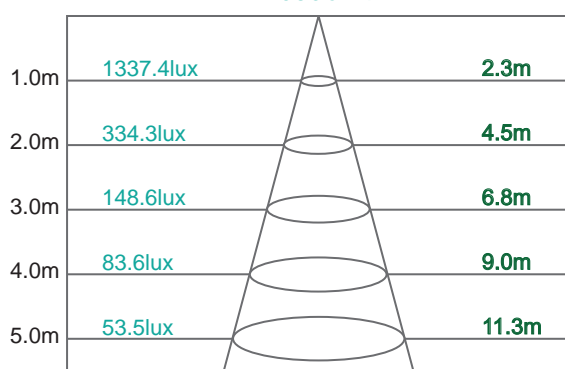

DE060C-191

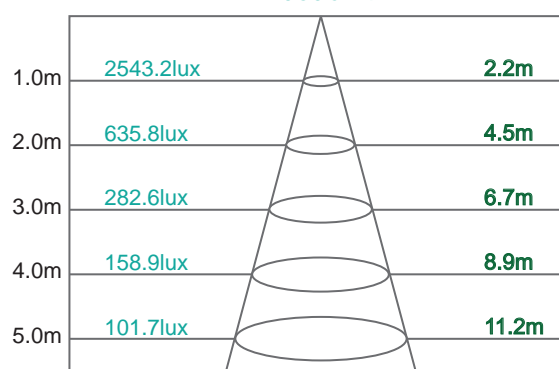

DE100C-191

