



LED Track Light

APPLICATIONS: Billboard, Landscape lighting, Commercial lighting etc.



1100 lm (OA012 , OD012)
2540 lm (OA025 , OD025)



OUR PROJECTS
12W LED Track Light



25W LED Track Light



LED Light Engine (Track/Ceiling Light)

Model : OA012 / OD012




Part No.	OA012X-20A*	OD012X-20A*	OA012X-30A*	OD012X-30A*
Rated Lumen**	1100 lm(Measured value:1110.7 lm)		1025 lm(Measured value:1026.7 lm)	
Rated Voltage	100-240VAC , 50/60Hz			
Power Factor	>0.9			
Lighting Efficacy**	93.3 lm/W		85.6 lm/W	
Rated Power	12W			
Angle	24°		38°	
Color Temperature	5000K / 4000K / 3000K			
CRI	>80, R9>0			
Dimension(±1mm)	153mm(L) x 90mm(W) x 80mm(H)	155mm(L) x 105mm(W) x 105mm(H)	153mm(L) x 90mm(W) x 80mm(H)	155mm(L) x 105mm(W) x 105mm(H)
Weight(±5%)	325g	290g	325g	290g
Usage	Track Light	Ceiling Light	Track Light	Ceiling Light

Note : * X can be replaced by C:5000K/ N:4000K/ W:3000K.


**The value is measured at 5000K.

● Diagram for illumination distance(Cool White 5000K)

OA012X-20A / OD012X-20A

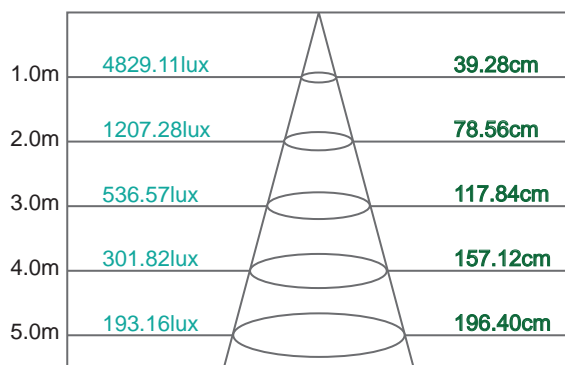

OA012X-30A / OD012X-30A

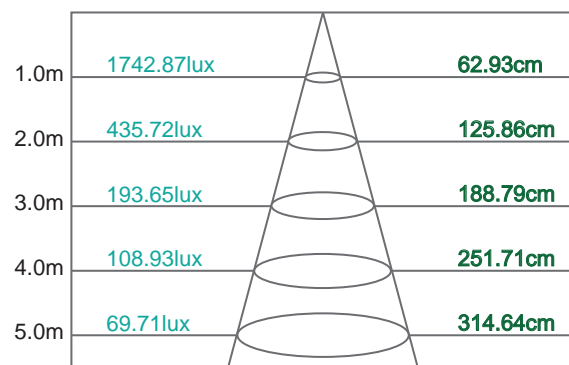

LED Light Engine (Track/Ceiling Light)

Model : OA025 / OD025




Part No.	OA025X-20A*	OD025X-20A*	OA025X-40A*	OD025X-40A*
Rated Lumen**	2540 lm(Measured value:2543 lm)		2360 lm(Measured value:2362 lm)	
Rated Voltage	100-240VAC , 50/60Hz			
Power Factor	>0.9			
Lighting Efficacy**	90.8 lm/W		84.3 lm/W	
Rated Power	25W			
Angle	20°		40°	
Color Temperature	5000K / 4000K / 3000K			
CRI	90(5000K) / 93(4000K) / 95(3000K)			
Dimension(±1mm)	130mm(W) x 180mm(H)	130mm(W) x 180mm(H)	130mm(W) x 180mm(H)	130mm(W) x 180mm(H)
Weight(±5%)	640g	660g	640g	660g
Usage	Track Light	Ceiling Light	Track Light	Ceiling Light

Note : * X can be replaced by C:5000K/ N:4000K/ W:3000K.

**The value is measured at 4000K.

● Diagram for illumination distance(Neutral White 4000K)

OA025X-20A / OD025X-20A

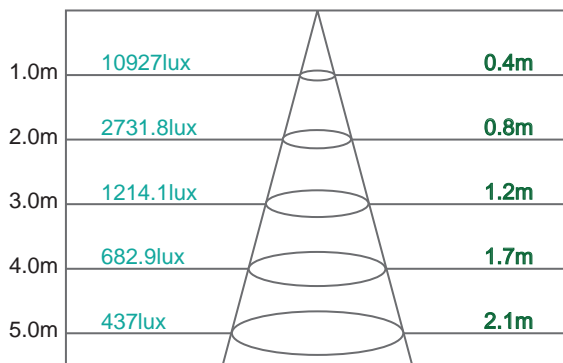

OA025X-40A / OD025X-40A

